

DELTA WATER TECHNOLOGY®



*Delta*  
WATER SOFTENERS



*Delta*  
**ONEGA  
DUPLEX**



- Non-electric operation
- Always soft water available
- Very high flow rates in service
- Limited salt and water consumption
- Free location of brine tank

100% GREEN






# Delta

WATER SOFTENERS

# ONEGA DUPLEX

## DIMENSIONS

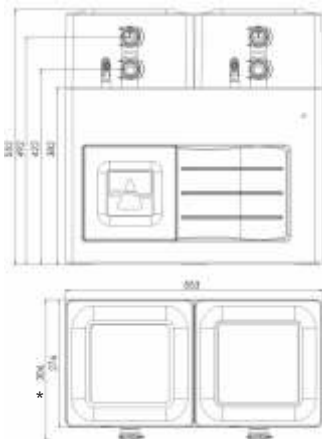

\* = 370 with collector

Unit Container



Salt Container



## TECHNICAL DATA

Connection	3/4" or 1"
Volume of resin	9 L (2x)
Working Pressure	1 - 8 bar*
Flow Rate ( $\Delta p$ 1 bar)	3.5 m <sup>3</sup> /h
Exchange Capacity	2 x 450 m <sup>3</sup> /ppm CaCO <sub>3</sub>
Water Usage / Regeneration	40 L (2x)
Salt Usage / Regeneration	0.9 kg (2x)
Regeneration Time	24 min.(2x)
Max. Temperature	40°C

\* for a correct regeneration, Delta Softeners require a minimum outlet pressure of 0.8 bar

100% GREEN

Delta Water Engineering NV  
 Waesdonckstraat 1, 2640 Mortsels (Antwerp), BELGIUM  
 T +32 3 219 50 70  
 E info@deltawatersystems.com U www.deltawatersystems.com

